

PRUISISCH BLAUW EN PLASTIGAUGE



Brochure 100924 © copyright Brammer

Hoewel de inhoud van deze prijslijst door ons zorgvuldig werd gecontroleerd kunnen wij geen enkele aansprakelijkheid aanvaarden voor eventuele onjuistheden of onvolledigheden. Veranderingen die worden doorgevoerd in het kader van onze politiek, de producten constant te optimaliseren, behouden wij ons voor. Niets in deze uitgave mag worden gekopieerd zonder onze voorafgaande schriftelijke toestemming.

Broschüre 100924 © copyright Brammer

Der Inhalt dieser Preisliste wurde von uns sorgfältig geprüft. Für allfällige Irrtümer, Druck- oder Setzfehler übernehmen wir keine, wie auch immer geartete Verantwortung. Änderungen des Lieferprogrammes oder technische Änderungen, die wir in dem Bestreben unsere Produkt-palette kontinuierlich zu verbessern, in unser Sortiment einfließen lassen, behalten wir uns auch ohne vorherige Ankündigung vor. Veröffentlichungen sowie Reproduktionen dieses Kataloges, auch auszugsweise, sowie die Ver- und Bearbeitung der in dieser Preisliste enthaltenen Daten auf elektronischem oder fotomechanischem Wege sind nur mit schriftlicher Einwilligung durch Brammer zulässig.

Brochure 100924 © copyright Brammer

While every effort was made to ensure the accuracy of the information contained in this price-list, Brammer will not be liable for any errors or omissions. We reserve the right to change specifications without prior notice, in order to optimise our products. Nothing in this publication, including extracts thereof, may be reproduced without our written permission.

Brochure 100924 © copyright Brammer

Malgré le soin apporté à la réalisation de ce tarif, la responsabilité d'Brammer ne peut être engagé par des éventuelles erreurs ou omissions. Nous nous réservons le droit d'apporter des changements sans avis préalable dans le cadre de notre politique d'optimiser nos produits. La reproduction, même partielle, de l'information contenue dans ce tarif est interdite sans autorisation par écrit.

Pruisisch blauw (Prussian Blue) wordt gebruikt voor het lokaliseren van oneffenheden bij precisie passingen van mechanisch bewerkte oppervlakken.

Pruisisch blauw	
Omschrijving	Beschikbaarheid
PER PRUISISCH BLAUW TUBE 22 MM	Uit voorraad





Technical Data Sheet

Permatex® Prussian Blue

AAM Revised 10/02

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex® Prussian Blue is a non-drying blue, oily paste type pigment designed to identify points of interference and high spots on precision parts to be fitted. It speeds tracing and precision fittings of close tolerance assemblies. Makes improper fitting high spots immediately visible as bright blue streaks.

PRODUCT BENEFITS


- Simple to apply
- Improper fitting spots immediately visible
- Non drying
- Easy clean-up

TYPICAL APPLICATIONS

- Bearings
- Valves
- Gears
- other close tolerance or machined assemblies

DIRECTIONS FOR USE

1. Coat parts with a uniform film of Prussian Blue.
2. Assemble in working position, turn shaft.

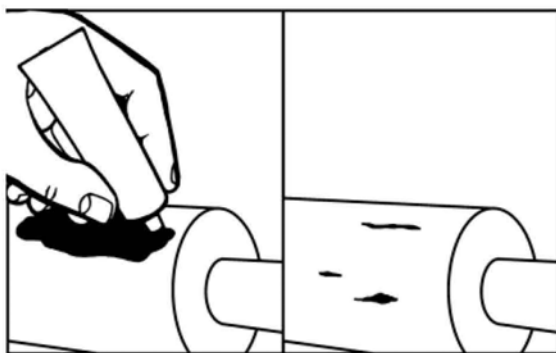

3. Improper fitting will show up as a definite, easy-to-see, bright blue streak.
4. Correct the seating of the assembly.
5. Wipe clean.

PROPERTIES OF UNCURED MATERIAL

	Typical Value
Chemical Type	Paraffinic hydrocarbon
Appearance	Blue, oily paste
Odor	Petroleum
Specific Gravity	0.88
Flash Point, TCC, °C (°F)	> 93 (200)

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
80038 (35V)	.75 fl. oz. tube

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8_ to 28_C (46_ to 82_F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.

Plastigauge zijn strookjes waarmee de speling tussen op elkaar gemonteerde delen eenvoudig kan worden vastgesteld.

Toepassingen zijn bijvoorbeeld het meten van de speling bij krukasglijlagers in automotoren, pijpflenzen en cilinderkoppen.

Pastigauge is leverbaar voor het meten van speling tussen 0,018mm en 1,750 mm, zie onderstaande tabel.

Plastigauge		
Omschrijving	Meetbereik	Beschikbaarheid
PLASTIGAUGE PL-A ZAKJE 10ST	0,025 mm – 0,175 mm	Voorraad
PLASTIGAUGE PL-B ZAKJE 10ST	0,100 mm – 0,250 mm	Voorraad
PLASTIGAUGE PL-C ZAKJE 10ST	0,175 mm – 0,500 mm	Voorraad
PLASTIGAUGE PL-D ZAKJE 10ST	0,500 mm – 1,500 mm	Enige weken
PLASTIGAUGE PL-E ZAKJE 10ST	0,750 mm – 1,750 mm	Enige weken
PLASTIGAUGE PL-X ZAKJE 10ST	0,018 mm – 0,045 mm	Voorraad

